



- Robustly constructed in stainless steel
- Space saving compact design
- Pack weight programming in seconds
- Fully automatic infeed control
- Automatic taring
- Capable of running with one or more channels disabled
- Count by weight, minimum weight or average weight programmes
- Positive counting with photocells available as an option
- Easy to combine with one or more packaging machines
- Premium reliability
- Market
- to to

# NEWTEC

the world leaders


M-Series

Model 3009M/3013M

NEWTEC A/S  
Stærmosegaardsvej 18  
DK-5230 Odense M  
Denmark

T: +45 66 15 84 44  
F: +45 66 15 44 39

sales@newtec.com  
www.newtec.com

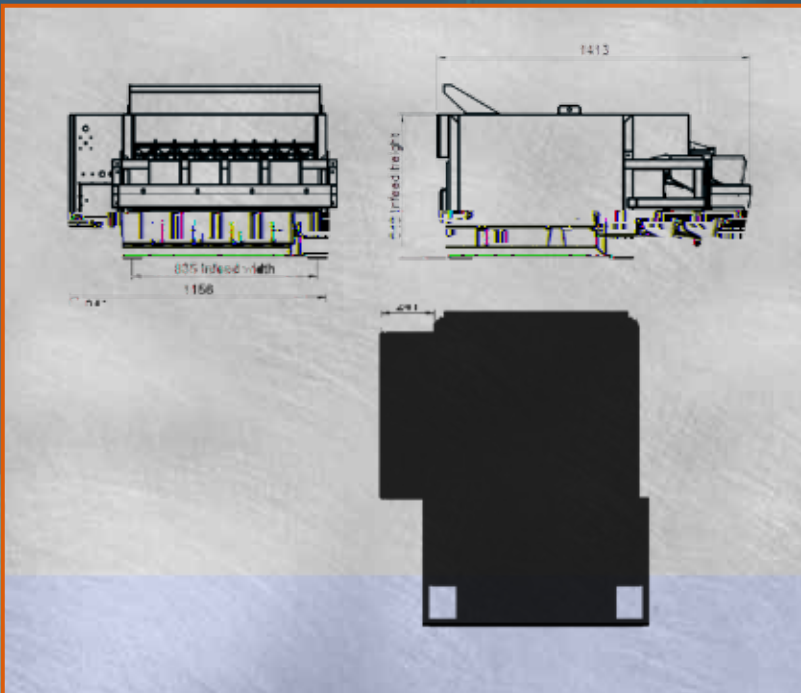

## Capacity

Portions per min. up to:	0.5 kg	1kg	2 kg
3009M	Onions 42	38	34
	Potatoes 48	45	42
3013M	Potatoes 65	50	40



## Technical Data

Air requirement:  
Min. pressure: 6 Bar/0.6 MPa  
Consumption: 120 NL/min  
Electrical requirement:  
Connection: 230/400 VAC+(N)+PE  
Total consumption 2 kW